



TAMKO[®]
BUILDING PRODUCTS



MOISTURE GUARD PLUS[®]

THE ULTIMATE UNDERLAYMENT

TAMKO[®] Moisture Guard Plus underlayment provides an extra layer of waterproofing protection to help prevent water penetration caused by windblown rain or ice damming. This self-adhering SBS-modified bitumen sheet creates a watertight barrier by sealing to the deck and around nails to provide years of continuous protection.

MOISTURE GUARD PLUS®

THE ULTIMATE UNDERLAYMENT

FEATURES AND BENEFITS

- Mineral surfacing—provides enhanced skid resistance.
- Strong fiberglass reinforcement—adds stability during installation.
- Flexible SBS-modified asphalt—seals tightly around nails to prevent water penetration.
- Split plastic release film—eases installation and handling.
- Self-adheres directly to plywood decks—for fast and simple installation.
- High temperature resistance up to 250°F.
- Meets ASTM D 1970, ICC-ESR-1252, U.L. Prepared Roofing Accessory.
- Available in full wrapper (nonboxed).

PRODUCT DATA*


	1 Square	1.5 Squares	2 Squares
Thickness	60 mil	60 mil	60 mil
Roll size	100 sq. ft.	150 sq. ft.	200 sq. ft.
Roll dimensions	39 3/8" x 30' 6"	39 3/8" x 45' 8"	39 3/8" x 61'
Rolls per pallet	40	30	24
Pallet size	37" x 47"	37" x 47"	37" x 45"
Packaging	Full Wrapper (nonboxed)	Full Wrapper (nonboxed)	Full Wrapper (nonboxed)



Nail holes and joints in your roof deck provide the channels for water to seep through.




Wind-blown rain trapped under your roof's top layer seeks out those channels.

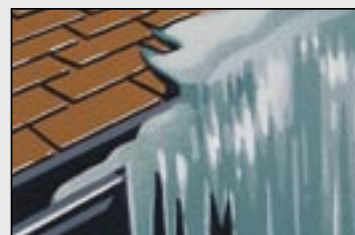

Backed up at the eaves by ice dams, melting snow finds access the same way.



Applying a layer of Moisture Guard Plus to the deck at all rake and eave edges a minimum of 24" beyond the interior wall line will provide a last line of defense against leaks, to help prevent backed-up water from getting into the home.

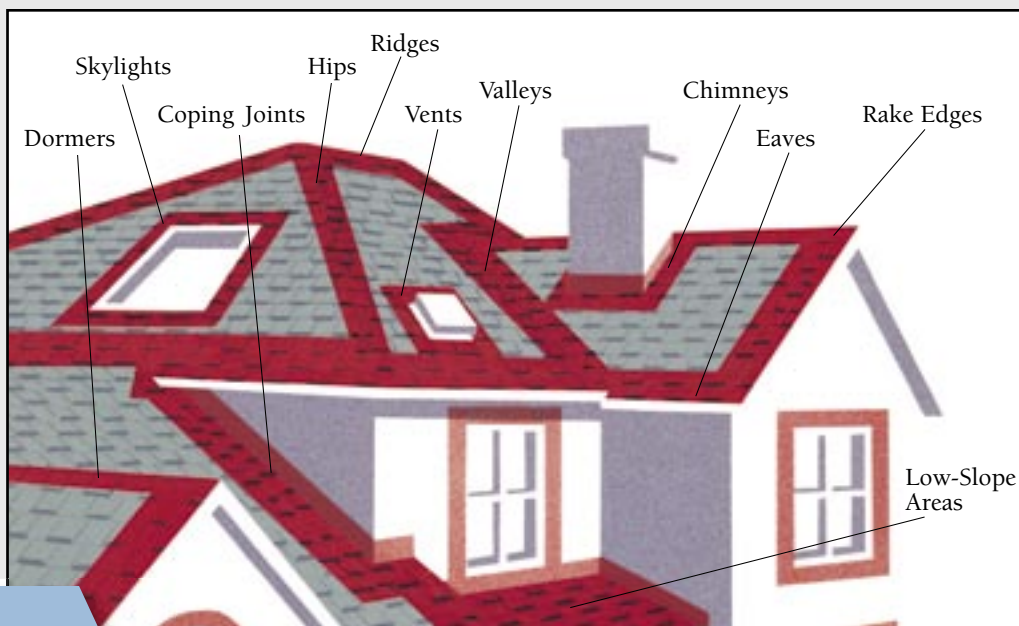

BUILDING PRODUCTS FOR THE PROFESSIONAL.

Not recommended for use under metal roofing. Use TAMKO® TW Metal and Tile Underlayment or TW Underlayment under metal roofing applications.



P.O. Box 1404 Joplin, MO 64802
1-800-641-4691
www.tamko.com

Pennsylvania Supply Co
Allentown 610.434.5295
Easton 610.250.8996



997685

TAMKO® and Moisture Guard Plus® are registered trademarks of TAMKO® Building Products, Inc. Note: TAMKO products should be applied in accordance with the directions listed above and on the product wrapper. If conditions require special fastening methods, obtain written recommendations from TAMKO.
*All values stated as nominal.

©2006 TAMKO Building Products, Inc.